

INJECTION FITTING




OVERVIEW

- Injection lance for better mixing
- Easy installation
- Maintenance free
- Mounting in any position
- High quality materials

TECHNICAL DATA

		8061.1	8062.1	8063.1
Nominal width	DN	10	15	20
Opening pressure	bar	0,05	0,05	0,05
Max. permissible operating pressure	bar	10	10	10

DIMENSIONS

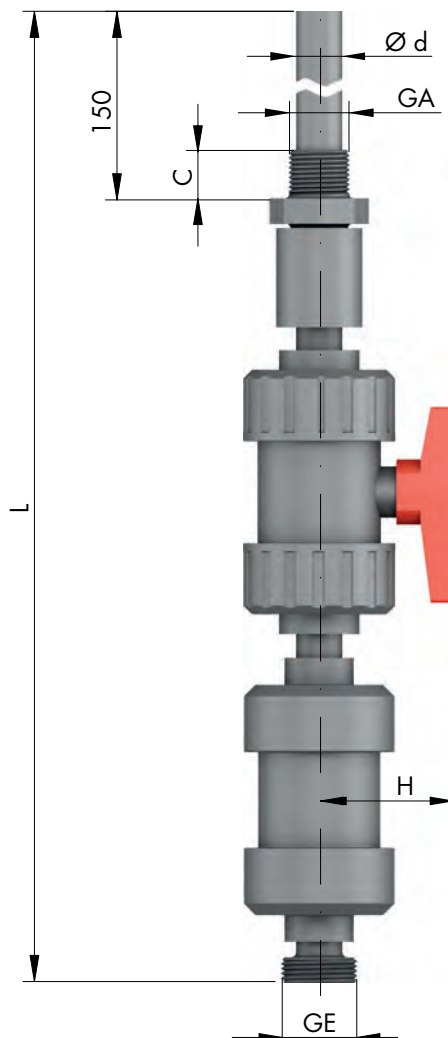

DIMENSIONS

		8061.1	8062.1	8063.1
GE	PVC-U, PP, PVDF	G $\frac{3}{4}$	G1	G1 $\frac{1}{4}$
GA	PVC-U, PP, PVDF	R $\frac{1}{2}$	R $\frac{3}{4}$	R1
d	PVC-U, PP, PVDF	16	20	25
C	PVC-U, PP, PVDF	17	19	22
H	PVC-U, PP, PVDF	72	72	77
L	PVC-U	390	409	447
	PP	427	439	481
	PVDF	438	446	483

(Dimensions in mm)

BASIC DESIGNS



Injection fitting

Properties

- incl. injection lance for better mixing
- Easy installation
- Any mounting position
- Maintenance-free
- High-quality materials

Basic version

- Cone-type check valve (spring loaded)
- Shut-off ball valve
- Injection lance (L=150mm)
- max. operating pressure: 10 bar

Type	DN	Inlet	Outlet	Material	Seals	Article-No.	Price (EUR)
8061.1	10	G $\frac{3}{4}$	R $\frac{1}{2}$	PVC-U	EPDM	37602105	▲
8061.1	10	G $\frac{3}{4}$	R $\frac{1}{2}$	PVC-U	FPM	37602106	▲
8061.1	10	G $\frac{3}{4}$	R $\frac{1}{2}$	PP	EPDM	37602107	▲
8061.1	10	G $\frac{3}{4}$	R $\frac{1}{2}$	PP	FPM	37602108	▲
8061.1	10	G $\frac{3}{4}$	R $\frac{1}{2}$	PVDF	FPM	37602109	▲
8062.1	15	G 1	R $\frac{3}{4}$	PVC-U	EPDM	37602110	▲
8062.1	15	G 1	R $\frac{3}{4}$	PVC-U	FPM	37602111	▲
8062.1	15	G 1	R $\frac{3}{4}$	PP	EPDM	37602112	▲
8062.1	15	G 1	R $\frac{3}{4}$	PP	FPM	37602113	▲
8062.1	15	G 1	R $\frac{3}{4}$	PVDF	FPM	37602114	▲
8063.1	20	G 1 $\frac{1}{4}$	R 1	PVC-U	EPDM	37602115	▲
8063.1	20	G 1 $\frac{1}{4}$	R 1	PVC-U	FPM	37602116	▲
8063.1	20	G 1 $\frac{1}{4}$	R 1	PP	EPDM	37602117	▲
8063.1	20	G 1 $\frac{1}{4}$	R 1	PP	FPM	37602118	▲
8063.1	20	G 1 $\frac{1}{4}$	R 1	PVDF	FPM	37602119	▲