

SUCTION LANCES




OVERVIEW

Compact, robust design
Easy handling
Maintenance free
High quality materials

TECHNICAL DATA

| Type | max. flow rate l/h | max. pump stroke volume cm ³ | max. viscosity of the conveyed medium mPas | min. density of the conveyed medium kg/dm ³ |
|------|-----------------------|--|--|--|
| S-01 | 200 | 20 | 100 | 1 |

DIMENSIONS

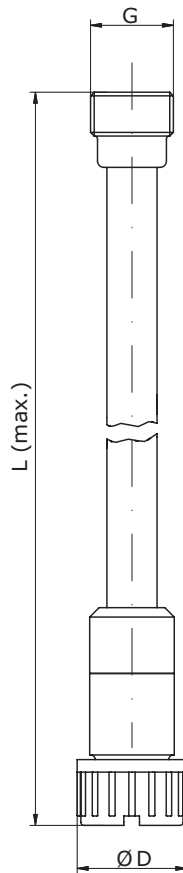

| | DN | G | D | max. L |
|------|----|-------|----|--------|
| S-01 | 15 | G 3/4 | 38 | 1.500 |

BASIC DESIGNS



Suction lance S-01 (without level switch)

Properties

- Compact, robust design
- Maintenance-free
- Easy handling
- High-quality materials

- individual special lengths
up to max. 1.500mm possible

Basic version

- Suction lance: **PVC-U**
- Foot valve: **PVC-U**
- Seals: **EPDM** or **FPM**
- Valve ball: **PTFE**
- max. flow rate: **200 l/h**
- Standard length: **650mm, 1.000mm und 1.250mm**

| Type | Length | Connection | Seals | Article-No. | Price (EUR) |
|------|---------------|------------|-------|-------------|-------------|
| S-01 | 650 mm | G 3/4 | EPDM | 37606591 | ▲ |
| S-01 | 1.000 mm | G 3/4 | EPDM | 37606592 | ▲ |
| S-01 | 1.250 mm | G 3/4 | EPDM | 37606593 | ▲ |
| S-01 | max. 1.500 mm | G 3/4 | EPDM | 37600705 | ▲ |
| S-01 | 650 mm | G 3/4 | FPM | 37606594 | ▲ |
| S-01 | 1.000 mm | G 3/4 | FPM | 37606595 | ▲ |
| S-01 | 1.250 mm | G 3/4 | FPM | 37606596 | ▲ |
| S-01 | max. 1.500 mm | G 3/4 | FPM | 37600817 | ▲ |