

Lutz Pump Sets

7 Pump Set „Solvents“ (stainless steel)

For easily flammable hydrocarbons

such as ethanol, gasoline, butanol, isopropanol, kerosene, methanol and petroleum.

- **Motor ME II 3**, 460 W or optionally with
- **Compressed air motor MD2xL**, 1000 W / 6 bar

Explosion proof according to ATEX Directive 2014/34/EU, category 2.

Motor ME II 3

Density (kg/dm ³)	Viscosity (mPas)	Delivery rate (l/min.)	Delivery head (m wc)
1.6	350	95 (60)	14

Motor MD2xL

Density (kg/dm ³)	Viscosity (mPas)	Delivery rate (l/min.)	Delivery head (m wc)
2,8	1000	124 (60)	35

Max. temperature of medium 100 °C

Specified values are maximum values determined with water at 20°C, measured directly at the pressure joint. Viscosity determined with oil. When using a nozzle the delivery rate is reduced to approximate values (see brackets).

Pump Set


with motor ME II 3

Motor ME II 3

The **explosion proof** universal motor ME II 3 is ideally suitable for transferring of many thin-bodied, easily flammable and combustible liquids.

Pump Set Solvents

with Motor MD2xL, The compact compressed air motor is powerful and reliable.

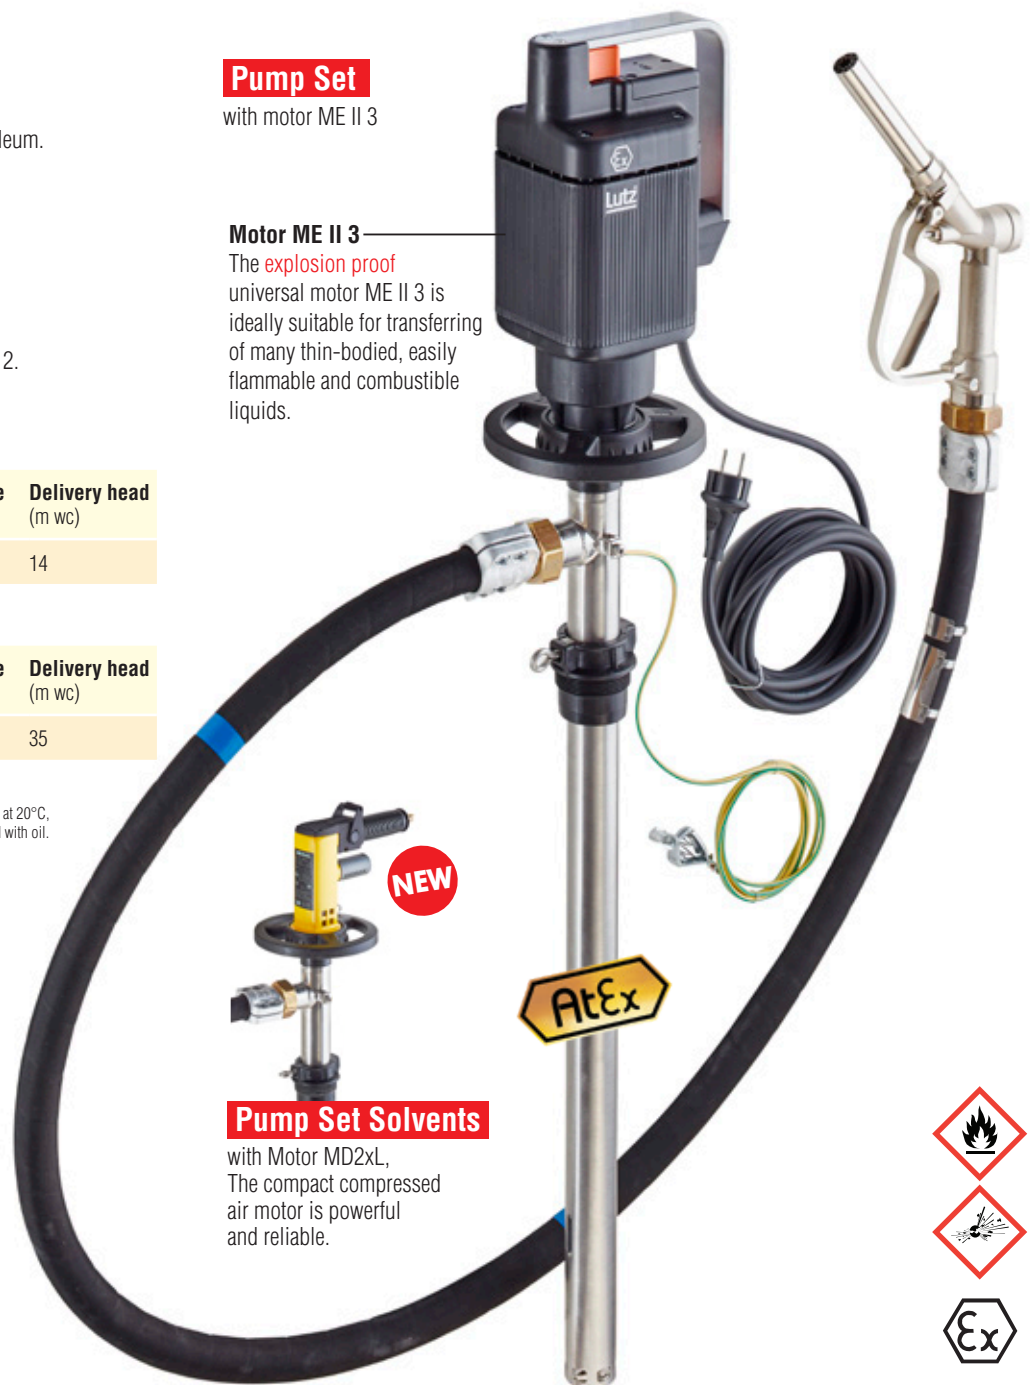

For emptying drums and containers	Pump with motor ME II 3		Pump with motor MD2xL		Set with motor ME II 3		Set with motor MD2xL	
	1000 mm	1200 mm	1000 mm	1200 mm	1000 mm	1200 mm	1000 mm	1200 mm
Pump tube SS 41-L-SL	✓		✓		✓		✓	
2 m solvent hose 3/4" *	-		-		✓		✓	
Drum adapter PP	-		-		✓		✓	
2 m equipotential bonding cable	✓		✓		✓		✓	
Nozzle brass	-		-		✓		✓	
Order No.	0205-405	0205-406	0205-475	0205-476	0205-401	0205-402	0205-471	0205-472

*electrically conductive bound with hose connectors brass.