

More time for the essential things

Pump Set „Hazardous Fluids“ for complete drum drainage (stainless steel) **10**

For hazardous fluids

such as acetone, conc. formic acid, ethyl acetate, butyl acetate, conc. acetic acid, nicotine, methyl benzene (toluol) and styrol.

- **Motor ME II 3**, 460 W or optionally with
- **Compressed air motor MD2xL**, 1000 W / 6 bar

Explosion proof according to ATEX Directive 2014/34/EU, category 2.

Motor ME II 3


Density (kg/dm ³)	Viscosity (mPas)	Delivery rate (l/min.)	Delivery head (m wc)
1.6	500	77 (45)	14

Motor MD2xL

Density (kg/dm ³)	Viscosity (mPas)	Delivery rate (l/min.)	Delivery head (m wc)
2.8	1000	67 (40)	28

Max. temperature of medium 100 °C

Specified values are maximum values determined with water at 20°C, measured directly at the pressure joint. Viscosity determined with oil. When using a nozzle the delivery rate is reduced to approximate values (see brackets).

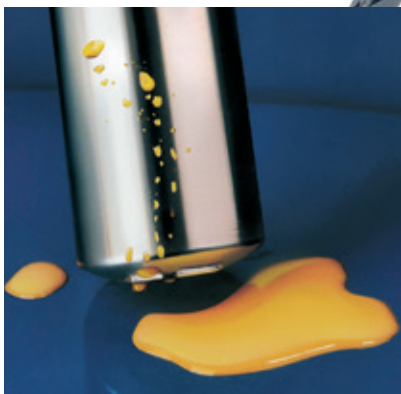

Complete drainage

Residual quantity < 0.10 litres

Motor ME II 3

The **explosion proof** universal motor ME II 3 is ideally suitable for transferring of many thin-bodied, easily flammable and combustible liquids.



Ex-plug

Can be optionally supplied with Ex-plug completely assembled.

Pump Set Ex

with motor ME II 3

Pump Set Ex

with Motor MD2xL, The compact compressed air motor is powerful and reliable.



For complete drainage of drums and containers	Pump with motor ME II 3		Pump with motor MD2xL		Set with motor ME II 3		Set with motor MD2xL	
Pump tube RE-SS 41-L-MS	✓		✓		✓		✓	
2 m universal chemical hose 3/4" *	-		-		✓		✓	
Drum adapter PP	-		-		✓		✓	
2 m equipotential bonding cable	✓		✓		✓		✓	
Nozzle in stainless steel (1.4571)	-		-		✓		✓	
Immersion depth	1000 mm	1200 mm	1000 mm	1200 mm	1000 mm	1200 mm	1000 mm	1200 mm
Order No.	0205-505	0205-506	0205-545	0205-546	0205-511	0205-512	0205-551	0205-552

*electrically conductive bound with hose connectors stainless steel.