
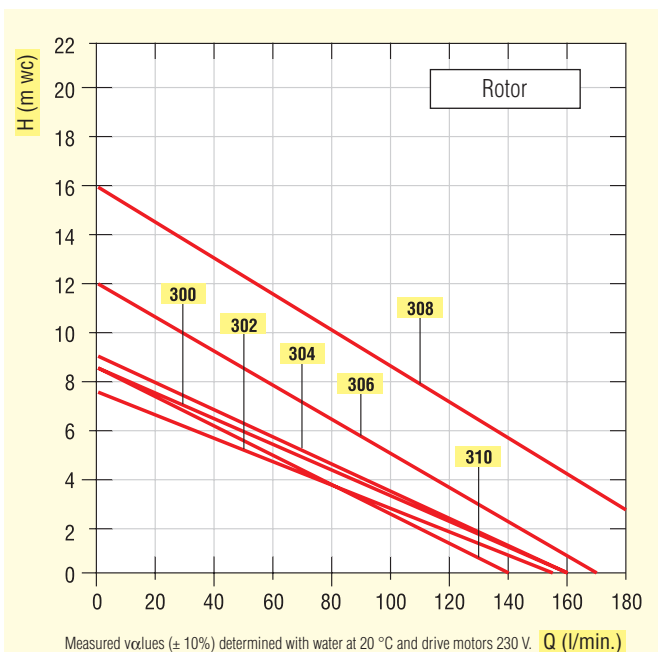


Pump Tube Alu (aluminium)

for neutral, non flammable liquids

Materials (coming into contact with the pumped medium):

Version:	SL	MS
Housing:	Alu, PVDF	Alu, PVDF
Impeller/Rotor:	ETFE	PP ETFE
Seals:	none	FPM
Mechanical seals:	none	Carbon, SiC, FPM, HC, HC-4 (2.4610)
Bearing:	ETFE	ETFE
Drive shaft:	Stainless steel (1.4571)	Stainless steel (1.4571)

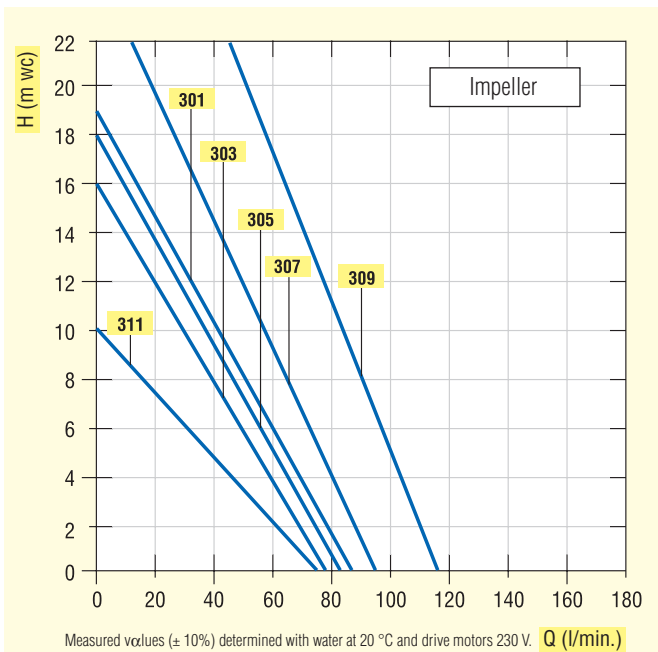

Please remember that the flow rate is reduced as the **viscosity** increases. The **density** of the pumped liquid similarly affects the flow rate, though to a lesser extent.

Accessories
hose connection
see page 83

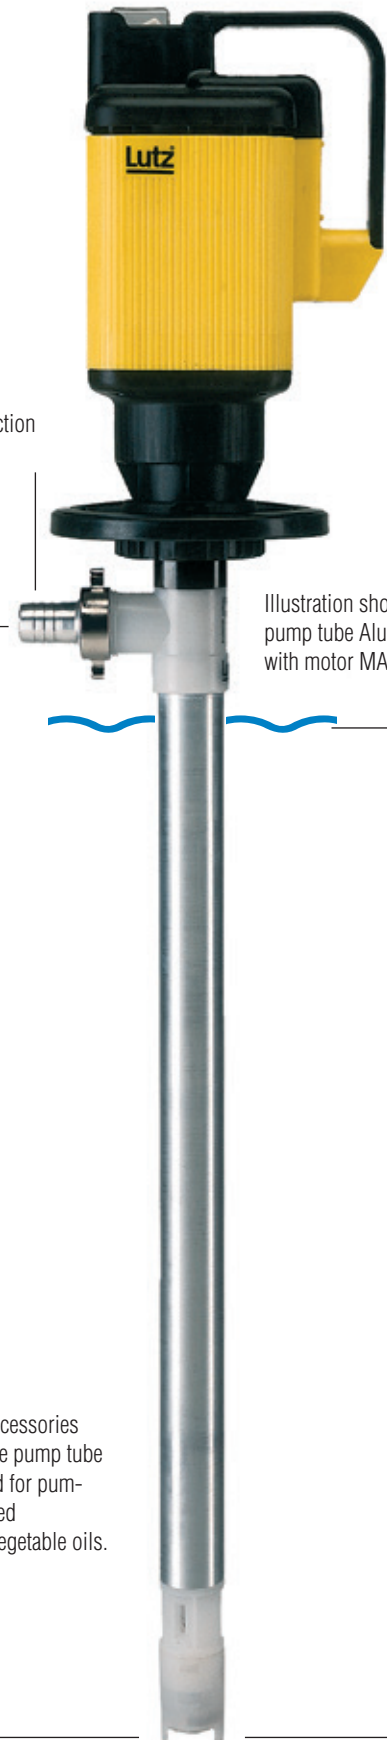


Illustration shows:
pump tube Alu
with motor MA II

Length

Utilisable Length (Length -50 mm)



With selected accessories (see page 96) the pump tube also can be used for pumping cold-pressed rapeseed- and vegetable oils.



Suitable range of accessories
see pages 80-96